

PIZZA HOT N14



Cielo/platea indipendenti
Ceiling/bedplate controls



Illuminazione alogena
Halogen lighting



Camere sovrapponibili
Overlapping chambers









17 mm
Platea in pietra refrattaria reversibile
Reversible refractory stone bedplate







50°-500°
Temperatura di utilizzo
Usage temperature



			DIMENSIONI ESTERNE EXTERNAL DIMENSIONS
Ø 360 mm			l.1010 x p.910 x h.420 mm
			DIMENSIONI CAMERA CHAMBER DIMENSIONS
600x400 mm			l.720 x p.720 x h.140 mm

SCHEDA TECNICA A PAGINA 104
TECHNICAL SHEET ON PAGE 104

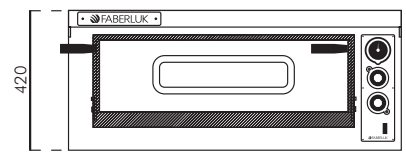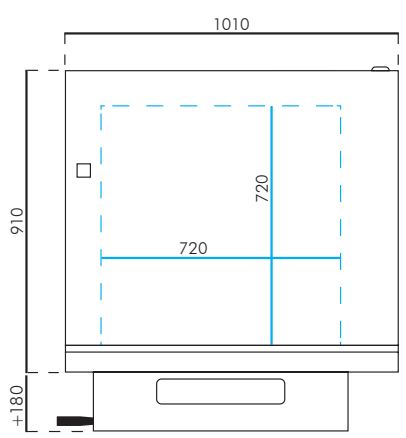

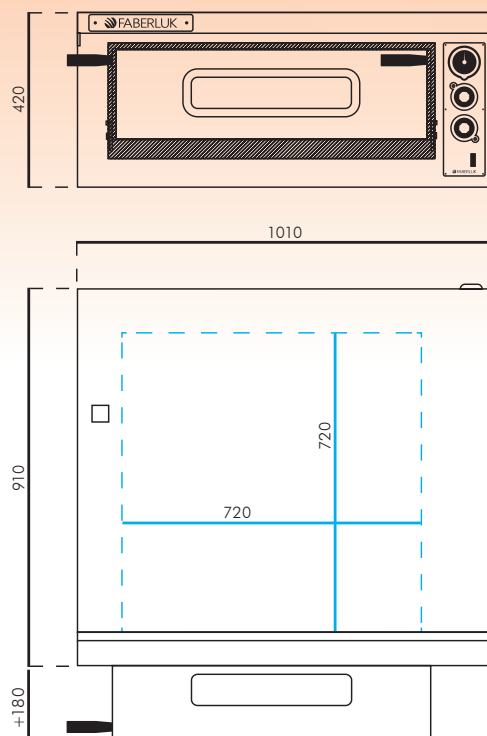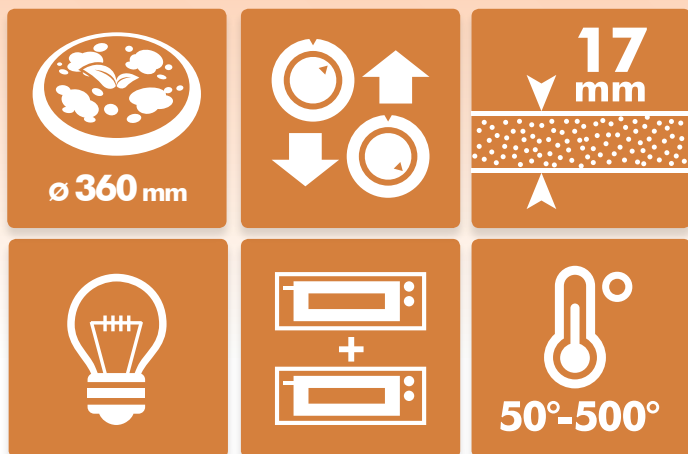

DIMENSIONI/Measures

VOLUME CON IMBALLO Volume with packaging	l.1090 x p.1040 x h.580 mm
DIMENSIONI ESTERNE External dimensions	l.1010 x p.910 x h.420 mm
DIMENSIONI CAMERA Chamber dimensions	l.720 x p.720 x h.140 mm
PESO NETTO Net weight	95 Kg
PESO LORDO Gross weight	105 Kg
SUPERFICIE TOTALE COTTURA Total cooking surface	0,51 m ²

CARATTERISTICHE/Details

CIELO/PLATEA INDIPENDENTI Ceiling/bedplate controls	✓
ILLUMINAZIONE ALOGENA Halogen lighting	✓
VETRO PANORAMICO SOSTITUIBILE Replaceable panoramic glass	✓
VALVOLA RILASCIO VAPORE Steam release valve	✓
PORTA BILANCIATA Balanced door	✓
CAMERE SOVRAPPONIBILI Overlapping chambers	✓
PIETRA REFRATTARIA REVERSIBILE Reversible refractory stone	✓

CAPACITÀ DI COTTURA/Cooking capacity

TEGLIE 600x400 600x400 trays	x1
PIZZA Ø 36	x4
TEMPERATURE Temperatures	50>500 °C

IMPIANTO ELETTRICO/Electric system

ALIMENTAZIONE Electrical supply	400V 3P+N+T/ 50Hz
	230V 3P+T/ 50Hz
POTENZA Power consumption	6 kW
RESISTENZE e POTENZA Resistors and power consumption	6x - 1000 W
CORRENTE NOMINALE Nominal current	400V 3P+N+T 8,6 A
	230V 3P+T 15 A
CAVO Electric cable	400V 3P+N+T 5G4
	230V 3P+T 5G4