

Project Name: _____

Location: _____

Item #: _____


Qty: _____

Model: ECO40

ECO40

Standard Features

- Front loading undercounter glasswasher
- Mechanical Control
- Clearance 270 mm
- Basket size 400 x 400 mm
- 1 washing cycles (2 min)
- Rack/h 30
- Temperature wash 85°C / rinse 60°C
- 0.50 hp wash pump
- Low water consumption 2 liters
- Simple to use
- Wide & clear buttons
- Single insulated panels
- Double insulated door
- Separate double washing & rinse
- Interior / exterior INOX 304
- Reinforced door hinges
- Robust structure
- Easy access to service

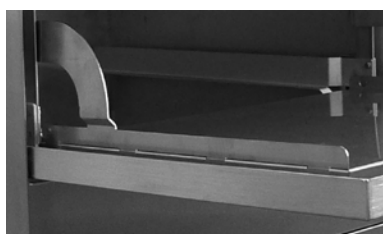


Optionals and Accessories

- Inox stainless steel wash arms
- Detergent peristaltic pump
- Rinse aid peristaltic pump
- Rinse pressure pump
- Automatic self cleaning drain pump



Approvals: _____

Available at: _____

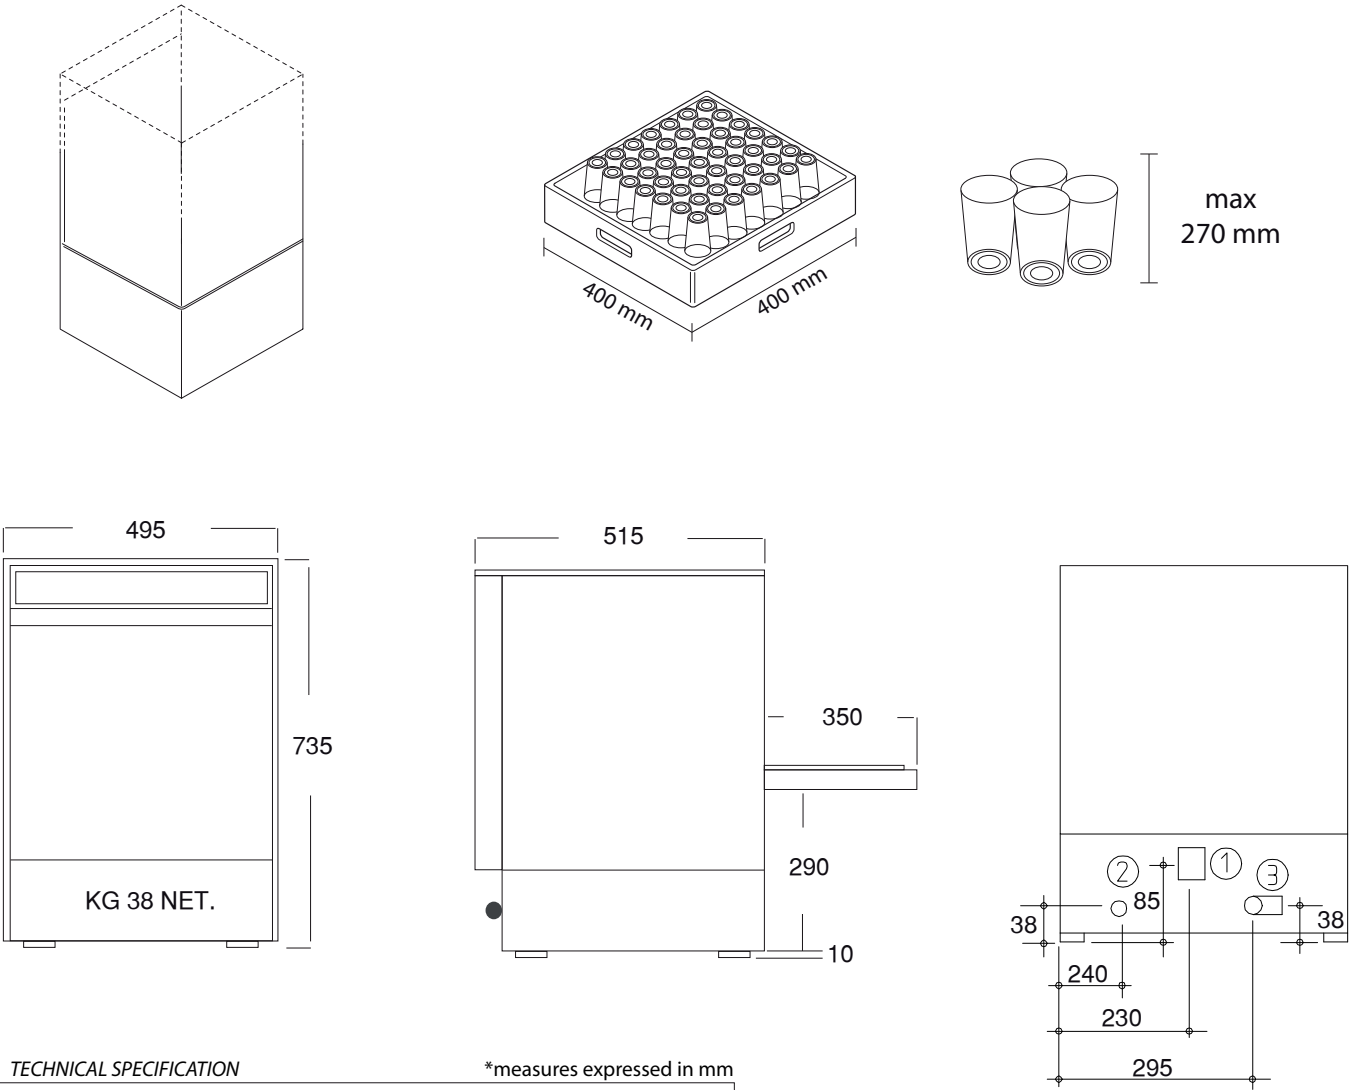

TECHNICAL SPECIFICATION

*measures expressed in mm

Model/Modello	ECO40
Interface Type/Interfaccia	Mechanical
Clearance/Passaggio Utile	270 mm
Cycle/Ciclo	2 min
Rinse Aid Dispenser/Dosatore Brillantante	✓
Detergent Dispenser/Dosatore Detergente	•
Drain Pump/Pompa Scarico	•
Thermostop System/Sistema Thermostop	n/a
Soft Start Cycle/Partenza Soft Ciclo	n/a
Temperature Display/Display Temperatura	n/a
Smart Self Diagnostics/Diagnostica Smart	n/a
Tank Capacity/Capacità Vasca	11 lt.
Boiler Capacity/Capacità Boiler	3 lt.
Tank Heater/Resistenza Vasca	2 kW
Boiler Heater/Resistenza Boiler	2,4 kW
Power Supply/Alimentazione Elettrica	230V/1N
Washing Pump/Pompa Lavaggio	0,37 kW/0.5hp
Max. Power Rating/Assorbimento Max.	12.4 Amp/2,8 kW
Inlet Pressure/Pressione di Alimentazione	2 ÷ 4 bar
Weight/Peso	38 Kg
Water Consumption/Consumo Acqua	2 lt./cycle**
Standard Equipment/Dotazione Standard	1 Rack (Universal) 1 Cutlery Cont.
Hour Production/Produzione Oraria	30 racks/h * 1080 glasses/h *

* 55°C inlet water temp. ✓ included/incluso n/a not available
** 2 bars inlet water pressure. • optional

- ① ELECTRICAL CONNECTION
- ② WATER CONNECTION
- ③ WATER DRAIN

